

425nm/6W Space Coupling Fiber Laser Module

LY4205-A Specifications


Features :

- Optical Power: 6W(CW)
- Wavelength: 420-430nm
- Rated current: 800mA(TYP.)
- Dimension: 53.8*25*16mm

Application Scenarios

- Medical Analytics
- Fluorescence Excitation
- Material Processing
- Biochemical Research
- Criminal Investigation
- UV Exposure


Outline

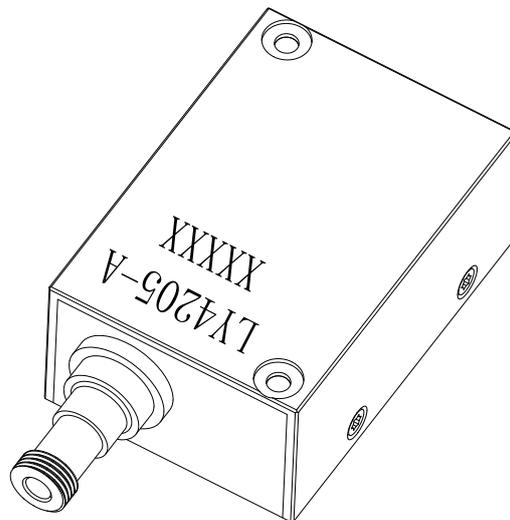

425nm/6W Space Coupling Fiber Laser Module

LY4205-A Specifications

Dimensions:

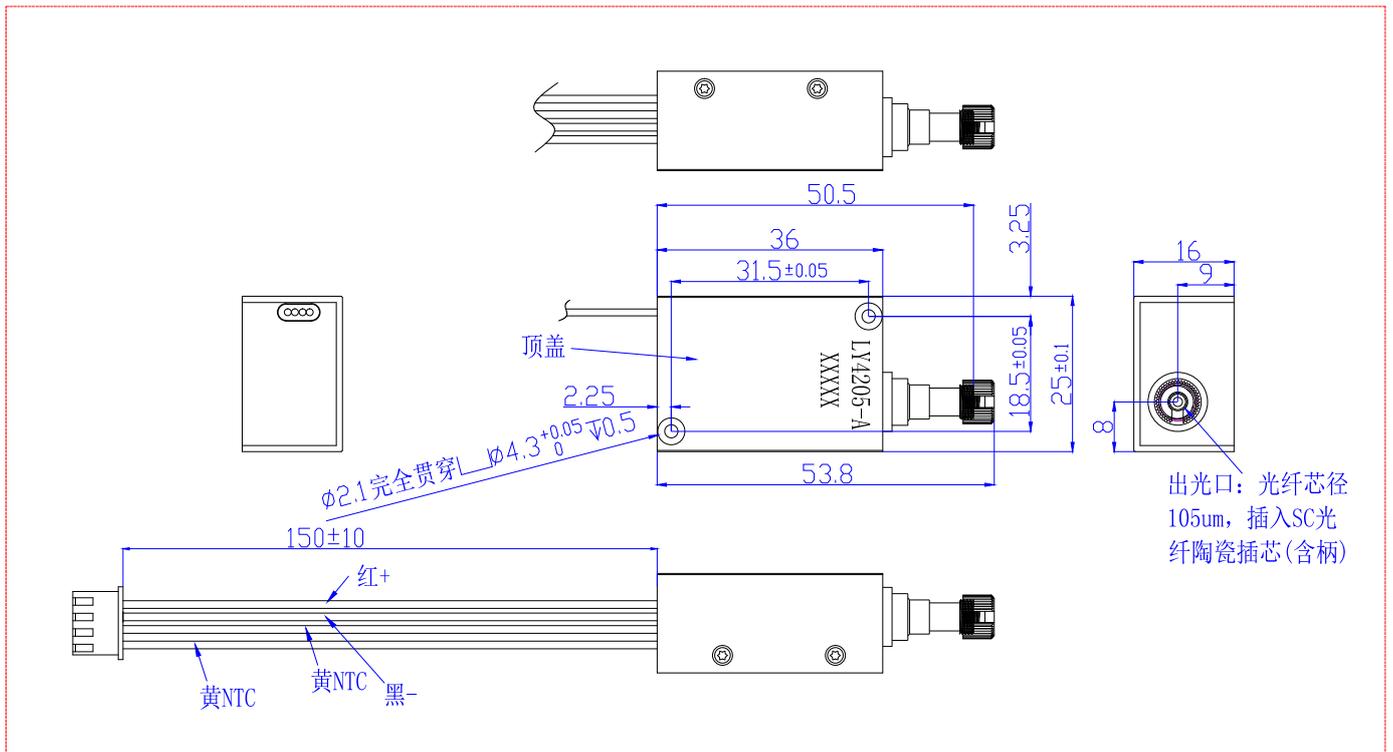

4P2.54 connector cable
Red/Laser (+)
Black/Laser (-)
Yellow/Thermistor

425nm/6W Space Coupling Fiber Laser Module

LY4205-A Specifications

Absolute Maximum Ratings (TC=25°C)

Item	Symbol	Ratings	Unit/Condition
Optical output power	PO	6	W
LD Reverse Voltage	VR(LD)	2	V
Operating Temperature	TOPR	17-25	°C
Working Humidity	RH	50%-70%	No condensation
Storage Temperature	TSTG	-40~+80	°C

Optical and Electrical Characteristics (Tc=25°C)

Item	Symbol	Min	Typ	Max	Unit	Test Condition
Output power	PO	5	5.5	6	W	
Threshold current	I _{th}	-	130	-	mA	
Working current	I _{op}	-	800	-	mA	
Working Voltage	V _{op}	-	18	20	V	
Wavelength	λ	420	425	430	nm	
Coupling Efficiency	η	80	85	-	%	Fiber core diameter 105μm
Shell Polarity				0	+/-/0	No polarity

425nm/6W Space Coupling Fiber Laser Module

LY4205-A Specifications

BU-LASER's special reminder: Please pay attention to electrostatic protection during transportation and use of laser products, and please do not exceed the maximum value in the application, so as to avoid the rapid aging of the laser.

BU-LASER does not grant any license to any of our product patents or any third-party patents, copyrights, trademarks, or other intellectual property rights contained in this document. Regarding the third-party rights related to the use of the information contained in this document (including knowledge property rights), BU-LASER may not bear any responsibility for possible problems.

Products and product specifications are subject to change without prior notice. Please confirm the latest product specifications before final design or purchase.

BU-Laser makes every effort to ensure the high quality and reliability of our products. However, when using this product in applications that require particularly high quality and reliability, such as aviation, aerospace, nuclear power, combustion control, transportation, traffic safety equipment or medical equipment for life support, or in cases where its failure or malfunction may directly threaten human life or cause physical injury, please contact our sales department.

When designing product applications, please pay attention to use it within the permitted range. In particular, the maximum ratings, operating voltage, current range, thermal radiation characteristics, installation conditions and other characteristics. BU-Laser does not assume any responsibility for failures or damage when used beyond the guaranteed range. Even within the guaranteed range, please adopt systematic measures such as failsafe, TVS diodes, etc. to protect the laser tube in consideration of the generally foreseeable failure rate or failure mode in semiconductor devices.

The laser will cause direct or indirect damage to the human body, especially the eyes. If you need to observe the laser, please use an ultraviolet camera to observe it.